

Bidbury & Co

Connection Guide Pull-Out Spray Rinse

It is essential that the following instructions are followed when connecting the rinse to a cold water supply. Failure to do so will invalidate the warranty and may result in premature product failure.

Installation Instructions

- Ensure the black nylon guide is securely fitted to the bottom of the threaded holder (see Diagram 2).
- The pull-out hose must drop vertically, with the weight attached at the lowest point (see Diagram 2).
- Loop the hose back upwards and connect to a pressure control valve followed by an isolating valve.
- Check that, during operation, the rinse moves freely and does not snag on any fittings within the sink cupboard.
- We recommend regularly inspecting the condition of the hose to maintain safety and optimal performance.

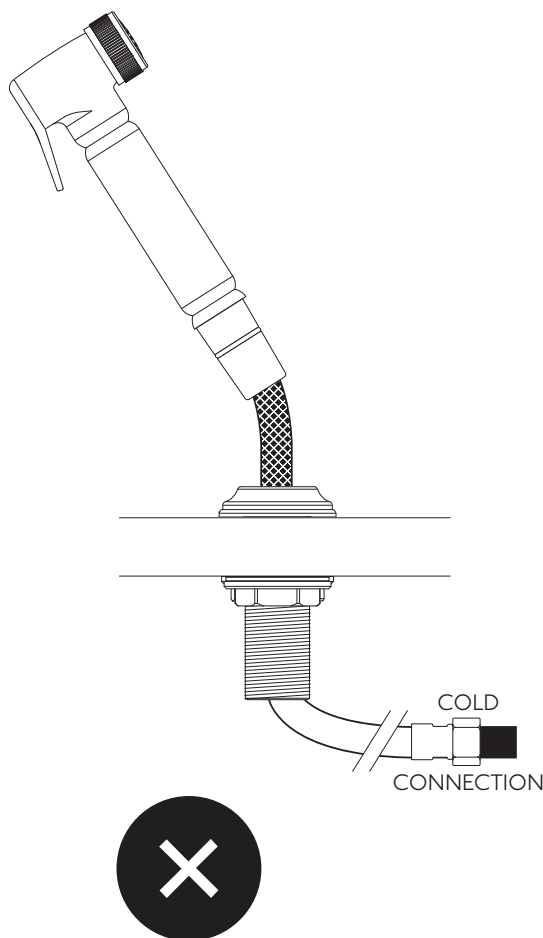


DIAGRAM 1

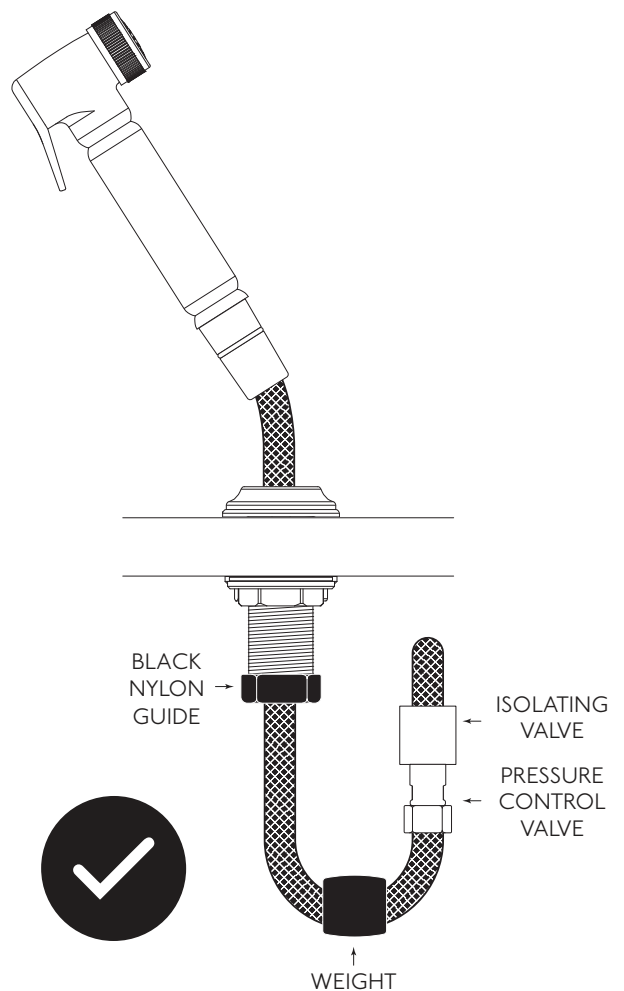


DIAGRAM 2